

# Model 1240

## Single Point Load Cells



### Features

- Capacities: 200—250 kg
- Stainless steel Construction
- Combined error only 0.02%
- 6 Wire (sense) circuit
- Unique humidity-resistant protective coating
- Low profiles—1.6" (40mm) in height
- Maximum safe moment to 30 X rated capacity (kg-cm)

Model 1240 is a low profile off-center load cell. It is one of the most compact designed available for these capacities which makes it especially well suited to scales which weigh people as well as high capacity industrial applications where space is limited.

This high accuracy load cell is Factory Mutual Approved. When operated at constant temperature, all load cells offer 0.02% combined error performance regardless of accuracy class.

Three beam construction makes the load cell highly immune to side forces and mounting imperfections.

Stainless steel construction and a unique humidity resistant protective coating assures long-term stability even under harsh environment and extreme temperatures. Optional Sylgard encapsulation is available for applications requiring wash down protection.



EXCELLENCE IN LOAD CELLS

#### Nordic Transducer

E-mail  
[ntt@ntt.dk](mailto:ntt@ntt.dk)  
Website  
[www.ntt.dk](http://www.ntt.dk)

Als Oddevej 85  
DK9560 Hadsund  
Denmark

TEL: +45 98581444  
FAX: +45 98581866

# Model 1240


# Single Point Load Cells

Grade	E	F	G	Units
Rated Capacities	200, 250			kg
Rated Output*	2.0 ± 10%			mV/V
Total Error**	0.05	0.02	0.03	±% of Rated Output
Zero Return after 30 mins	0.050	0.025	0.017	±% of Applied Load/cm
Temperature Effect: On Output	0.003	0.0014	0.001	± of Applied Load/°C
Temperature Effect: On Zero	0.010	0.006	0.004	± of Rated Output/°C
Total Error Eccentric Loading 0.33 R.C.	0.0075	0.0075	0.0050	±% of Applied Load/cm
Zero Balance	10			±% of Rated Output
Temperature Range: Operating	-30 to +70			°C
Temperature Range: Compensated	-10 to +40			°C
Safe Overload	150			% of Rated Capacity
Ultimate Overload	250			% of Rated Capacity
Excitation: Recommended	10			Volts AC or DC
Excitation: Maximum	15			Volts AC or DC
Input Impedance	380 ± 15			Ohms
Output Impedance	350 ± 3			Ohms
Insulation Impedance	>2000			MegaOhms
Deflection at Rated Capacity	>0.4			mm
Weight: All Types	1.1			kg
Construction	Stainless Steel			
Environmental Protection	IP54 Standard / IP 65 Optional			
Cable	1.5 Meter (Standard), 6 Wire, PVC jacket, Floating Screen			

\*All accuracy specification maintained when 150% of nominal load is applied for 3 mV/V output.

\*\*Nonlinearity, hysteresis, repeatability, and output temperature effect according to OIML R60 and NIST H-44.

## Wiring Schematic Diagram

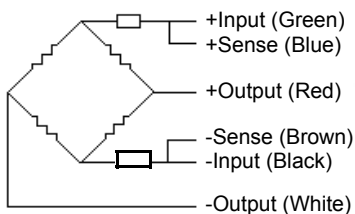

## Outline Dimensions All Capacities (in inches)

