


**Double-Ended Shear Beam Load cell**  
**Model: DCO-2**



**DCO-2** load cell

Rated capacity: 3, 4, 5, 7.5 & 10ton  
 Accuracy class: 0.020 % ref. OIML R60, C3-C4-C5  
 Rated output: 2 +/- 0,1% mV/V  
 $Y = E_{max} / V_{min} = 1/15000$   
 Excitation Voltage: 5 - 15V  
 Input Resistance: 700 Ohm  
 Output resistance: 700 Ohm  
 Temperature limits: -10°C - +40°C  
 Protection against humidity : IP67  
 Material: Nickel plated alloy steel or Stainless steel

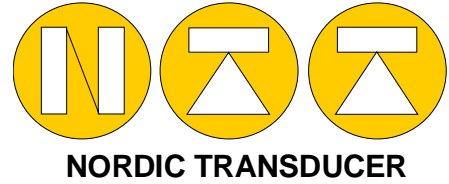

OIML R60 approved  
 per N. Test Certificate: E-09.09.C08

**With tank mount module TYPE: ANTIV-TB**



DCO-2 can be supplied with this base support +  
 different types of silo mounts as shown to the left.

*Dimensions in mm*

