


ELAP CM78

MICROPROCESSOR COUNTER DISPLAY INCREMENTAL ANALOG

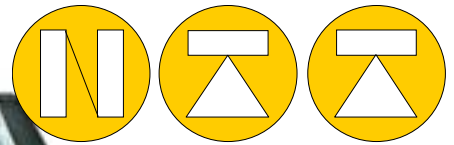



NORDISK TRANSDUCER

□ **ELAP CM78** is a very fast instrument which can manage input speeds up to 40kHz as direct counter input and up to 10kHz with quadrupling, this with indication of max. 6 digits or 5 with negative sign.

2 relay outputs are included and 5V or 12V transducer supply can be specified at order. RS232 or RS485 is an option for all the main program versions and for special versions 2 instruments can communication with each other.

□ SPECIFICATIONS

- ✓ Supply 220 VAC or 24/110 VAC 50/60Hz +/-10%
- ✓ 6 digit display / 5 with negative sign.
- ✓ Counter input NPN open collector signal (PNP as option)
- ✓ 2 normally open relay, 3A max. 220V max.
- ✓ 2 inputs which are used at specific programs
- ✓ Decimal point selectable on display
- ✓ Correction factor for input
- ✓ Data stored in EEPROM

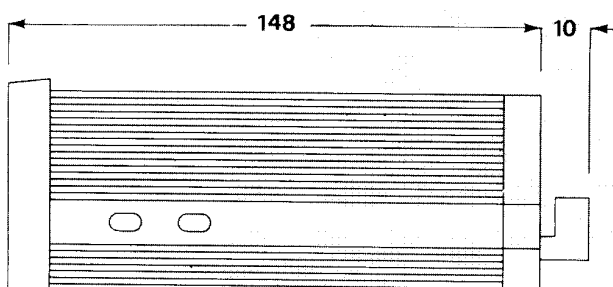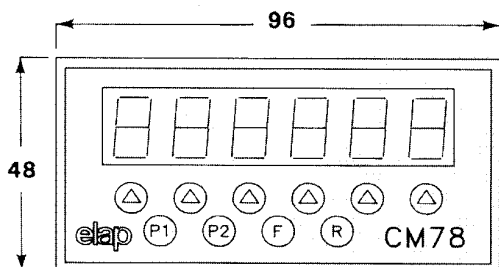

PANEL CUT OFF 92x45 mm

CM78 Can be delivered with more than 40 different software versions, depending on the type of job it has to fulfil, as basic versions these can be following

□ Counter for

ENCODER or MICRO SWITCH INPUT

Up / down counter with 2 relay outputs
Speed counter with correction factor.
Preset counter with 2 relay outputs
2 preset counters with setup via RS232
Tacho input with relation between 2 inputs
Counter with total and subtotal indication.
Tacho with time-base between 2 input.
Indication of angel / degree

□ INCREMENTAL TRANSDUCER

All types can be sat up to x4, x2 or direct.
Indication of length with 2 set-point relays
Length with zero pulse and 2 setpoint relays
Length with LOAD value for zero + 2 relays
Indication of degree
Direct indication with analog output +/-10V or 0-10V.
Direct indication with input for mm or Inch.

□ ANALOG TRANSDUCER

Direct indication with 2 setpoint relays
Direct indication with LOAD value for zero.

Nordisk Transducer Teknik

Als Odde, DK-9560 Hadsund Denmark

Tel.: +45 98 58 14 44, Fax.: +45 98 58 18 66

E-mail: ntt@ntt.dk WEB: <http://www.ntt.dk>